

PEERLESS LLG Hi-Temp Grease 400gm

DEMAND THE BEST


If your machinery operates continuously at high temperatures, in wet conditions, under force, or even in very dusty or dry conditions, you need your lubricant to work just as hard.

Our PEERLESS line of premium-performance, multi-application greases have been formulated to reduce operating costs and provide extended protection.


This premium grease provides excellent service life under high operating temperatures.

It's recommended for:

- Sealed-for-life bearings found on automotive and industrial equipment
- Other life pack applications:
 - Constant velocity joints
 - Bearings and slide-ways operating continuously at temperatures up to 200°C/392°F

	Test Method	XL EP2
NLGI Grade	D217	2
Colour	PCM 264	
Timken OK Load, kg/lb	D2509	27/60
Four Ball Wear scar diam, mm	D2596	0.45
Water Washout % @ 79°C/174°F	D1264	1.5
Recommended Operating Temperature Range, °C	N/A	-20 to 200
Recommended Operating Temperature Range, °F	N/A	-4 to 392

PC PEERLESS LLG's long life under high temperature provides long-lasting equipment protection

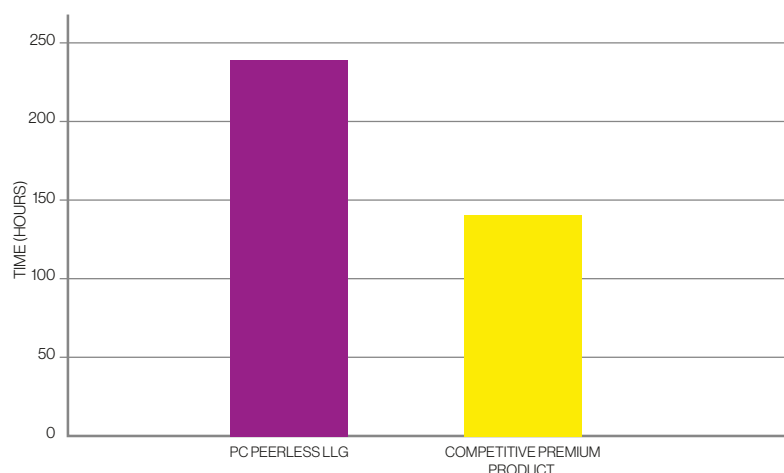

ASTM D3527 Bearing Life Performance Test at 160°C (320°F), 1,000rpm speed and 111 N thrust load



0800 278 600
sales@euomarc.co.nz
euomarc.co.nz

euomarc®
So Quick. So Easy